IJ-8


Rotary encoder decoder

The IJ-8 module provides an extremely easy means of interfacing with a mechanical rotary encoder. The on-board microcontroller handles all decoding/debouncing of both the quadrature and switch signals from the encoder and provides simple logic-level step, direction and switch outputs.

It uses a high-quality Bourns encoder (Bourns part number PEC11-4215F-S0024) to ensure reliable operation and long life. The shaft has 24 detents per revolution.

Operation is from a 2.5V to 5V supply. The connections are all on a 0.1" pitch so standard pin headers can be used. Two additional holes (MOUNT1/2) are provided for extra rigidity when mounting the module directly on a PCB - these are connected to 0V.






Timing waveforms

Each time the shaft passes a detent position, the direction output (DI) is updated and a 1ms long pulse is produced on the step output (ST).

The switch output (SW) is debounced with a delay time of 30ms.

All outputs are logic levels.

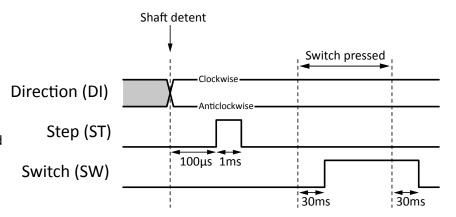



Pinout/dimensions

+V 2.5V to 5V supplyST Step pulse outputDI Direction output

(high=CW low=ACW)

SW Switch output **6V** OV supply



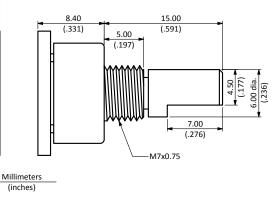



73 Harburn Road West Calder West Lothian EH55 8AT, UK.